






240W GaN PD 3.1 Charger – 3C1A



Single charging port:
 USB-C1: up to 140W; USB-A: up to 30W
 USB-C2 & USB-C3: up to 100W

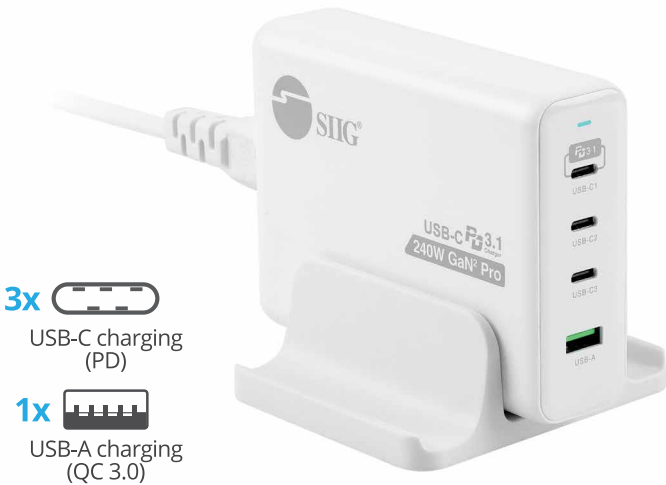Part# AC-PW1X11-S1




- 3x  USB-C charging (PD)
- 1x  USB-A charging (QC 3.0)

Flexible 240W high power application and GaN² Pro technology easily charge and protect 3 USB-C and 1 USB-A powered devices simultaneously, whatever on the go or in the office

- This 240W GaN PD 3.1 Charger provides a total 240 watts power output- Max. 1x USB-C PD 3.1 140W (USB-C1), 2x USB-C 100W (USB-C2 & C3), and 1x USB-A 30W
- One USB-C (USB-C1) port is compatible with Power Delivery 3.1, two USB-C (USBC2 & C3) ports are compatible with Power Delivery 3.0, Fast Charging 2.0, and Programmable Power Supply (PPS), and one USB-A port is compatible with Quick Charger 3.0 (QC 3.0) protocol technology
- Comes with 3 USB-C and 1 USB-A fast charging ports to fully charge your power devices such as laptop, tablet, smartphone, camera... simultaneously for best power charging efficiency
- The new Gallium Nitride 2 (GaN²) Pro semiconductor material achieve low heat temperature, higher charging efficiency, hard, and smaller size. Allows operation at higher voltages and switching frequencies, is more powerful and durable, and offers multiple protections to protect your devices from Over-Current, Short-Circuit, and Over-Voltage

1-Port	2-Port	3-Port	4-Port
USB-C1 140W	USB-C1+C2 140W+100W	USB-C1+C2+C3 140W+65W+35W	USB-C1+C2+C3+USB-A 140W+45W+35W+18W)
USB-C2 100W	USB-C1+C3 140W+100W	USB-C1+C2+USB-A 140W+65W+30W	Automatic Adjustment Power Deliver
USB-C3 100W	USB-C1+USB-A 140W+30W	USB-C1+C3+USB-A 140W+65W+30W	
USB-A 30W	USB-C2+C3 65W+35W	USB-C2+C3+USB-A 45W+35W+18W)	
	USB-C2+USB-A 65W+30W		
	USB-C3+USB-A 65W+30W		

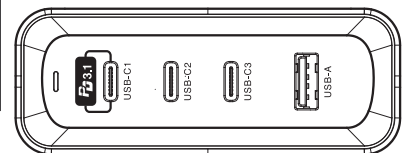

Common Applications

- Office, Home, Workstation, Hotel, Coffee shop, Airport, Travel, Restaurant, Library

